



## WATER ALARM DETECTOR

### GENERAL FEATURES

#### Warnings

- It should be bonded to a high point from the device surface.
- The probe must be placed that touches the ground by opening the adhesive.
- Alkaline batteries should be used.
- The battery has a standby life of 2 years. If you stay in the alarm for a long time (max. 7 hours), the batteries must be checked and replaced by the user.

#### Instruction Manual

- Remove the device from the case.
- Remove the battery from nylon and open the back cover of the device.
- Connect the sensor to the appropriate socket by supplying the sensor cable.
- Make a check by touching the end of the sensor with a damp cloth.

The alarm LED should be on and the alarm should be buzzing (when the button on bottom is on). The siren will shut down when the button is switched off. But the LED will continue to on.

When the probe gets out of the humid situation, the LED will also go out. Leave the button on.

- Mount the sensor on the floor with the glue behind it.
- If you are using the relay output, you can connect it to your alarm panel, solenoid valve or similar control system.
- There is no need to change the battery because the device does not take any energy except for the alarm position.
- According to the date of manufacture, the battery standby life is 2 years.

The Ayvaz Water Raid Detector is used at homes, offices and similar places to prevent water flooding and take precautions. It is powered by 9V alkaline battery. NA / NK contact output is available. With relay output, solenoid valve is controlled to stop water leak.

By playing the siren, people benefit by drawing attention and taking precautions.


#### Advantages

- Long battery life.
- Can be connected to the alarm panel.
- Installation is easy.
- It is economical.


#### Application Areas

Operation and Computer Rooms, Generator & Compressor Rooms, Bath & Kitchen, Fire Alarm System, A/C Rooms, Warehouse

# WET ALARM DETECTOR

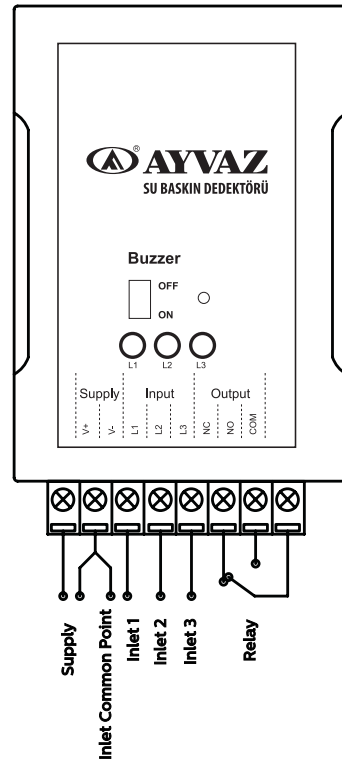

**Note:** Probe cable will be supplied by the customer.

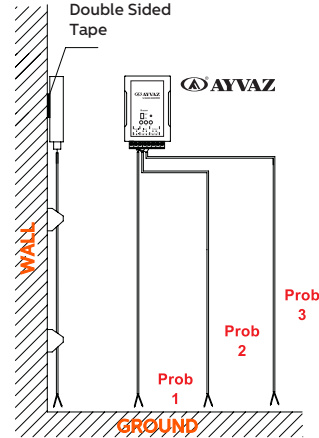

TECHNICAL SPECIFICATION	
Display	3 Alarm LEDs
Alarm	1 Alarm + ON/OFF Button
Sensor	Two point cable, 3 sensors can be connected to 1 meter standard device.
Supply	1x9 V (6LR22) Pil veya 24 VDC
Outlet	2A / 125 VAC NA - NK
Battery Life	Holding 2 years
Box	ABS Plastic, Black color (Opt. Light Gray) (1 product, 1 Battery, 1 Double-sided tape, 2 items for fixing the wall)
Weight (with Box)	190 gr.
Dimensions	70x100x22 mm



## HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL  
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27  
info@ayvaz.com | www.ayvaz.com

### Cona Caserta/Italy

Tel: +39 0823 187 3988  
rmolaro@ayvaz.com

### Ayvaz Germany Viernheim/Germany

Tel: +49 62046014399  
germany@ayvaz.com

### Ayvaz Ukraine Kiev/Ukraine

Tel: +380 44 390 57 57  
info@ayvaz.com.ua

### Tricorr Warsaw/Poland

Tel: +48 530 030 810  
+48 533 603 335  
tricorr@tricorr.eu

### Ayvaz Azerbaijan Baku/Azerbaijan

Tel: +99 (455) 579-84-32  
ahayatov@ayvaz.com

### Ayvaz Egypt Cairo/Egypt

Tel: +20 122 819 78 29  
andrew.eid@ayvaz.com

### Ayvaz Gulf Dubai/U.A.E

Tel: +971 563550822  
+971 501306871  
mideast@ayvaz.com

### Ayvaz China Ningbo/China

Tel: +86 152 5830 7361  
msahin@ayvaz.com

### Ayvaz Kazakhstan LLP Almaty/Kazakhstan

Tel: +7 (727) 327 97 57  
info\_kz@ayvaz.com

### Ayvaz N İsperih/Bulgaria

Tel: +359 8431 27 32  
office@ayvaz-n.eu

### Ayvaz Serbia Belgrade/Serbia

Tel: +381 61 658 70 52  
yakbiyik@ayvaz.com

### Ayvaz Vietnam HCMC/Vietnam

Tel: +84 89 8508345

### Ayvaz Americas Rhode Island/USA

Tel: +1 401 737 8380  
americas@ayvaz.com