



Indoor Fire Hose Cabinets






1" SEMI RIGID FIRE HOSE DOUBLE DOOR CABINET							1" SEMI RIGID FIRE HOSE SINGLE DOOR CABINET						
MODEL	TYPE	VALVE SIZE	HOSE LENGTH (m)	DIMENSION (mm)	DOOR TYPE		MODEL	TYPE	VALVE SIZE	HOSE LENGTH (m)	DIMENSION (mm)	DOOR TYPE	
AFC-R1020DDS			20	980x740x200	DOUBLE	STEEL	AFC-R1020D0S	RECESSED	1"	20	740x980x200	SINGLE	
AFC-R1025DDS		1"	25				AFC-R1025D0S			25			STEEL
AFC-R1030DDS	RECESSED		30				AFC-R1030D0S			30			
AFC-R2020DDS			20				AFC-R2020D0S		2"	20			STE
AFC-R2025DDS	22	2"	25				AFC-R2025D0S			25			
AFC-R2030DDS			30				AFC-R2030D0S			30			
AFC-R1020DDG			20	980x740x200	DOUBLE	GLASS	AFC-R1020D0G	RECESSED	1"	20	740x980x200	SINGLE	
AFC-R1025DDG		1"	25				AFC-R1025D0G			25			
AFC-R1030DDG	SSE		30				AFC-R1030D0G			30			GLASS
AFC-R2020DDG	ECESSED	2"	20				AFC-R2020D0G		2"	20			GE,
AFC-R2025DDG	2		25				AFC-R2025D0G			25			
AFC-R2030DDG			30				AFC-R2030D0G			30			
AFC-\$1020DD\$		1"	20	1000x740x200	DOUBLE	STEEL	AFC-S1020D0S	SURFACE	2"	20	740x1000x200	SINGLE	EEL
AFC-S1025DDS	بب		25				AFC-S1025D0S			25			
AFC-S1030DDS	A O		30				AFC-S1030D0S			30			
AFC-S2020DDS	SURFACE	2"	20				AFC-S2020D0S			20			STE
AFC-S2025DDS	S		25				AFC-S2025D0S			25			
AFC-S2030DDS			30				AFC-S2030D0S			30			
AFC-S1020DDG	SURFACE	1"	20	1000x740x200	DOUBLE	GLASS	AFC-S1020D0G	SURFACE	1"	20	740x1000x200	SINGLE	
AFC-\$1025DDG			25				AFC-S1025D0G			25			GLASS
AFC-\$1030DDG			30				AFC-S1030D0G			30			
AFC-S2020DDG	URF	2"	20				AFC-S2020D0G		2"	20			G G
AFC-S2025DDG	S		25				AFC-S2025D0G			25			
AFC-S2030DDG			30				AFC-S2030D0G			30			



Dimensions

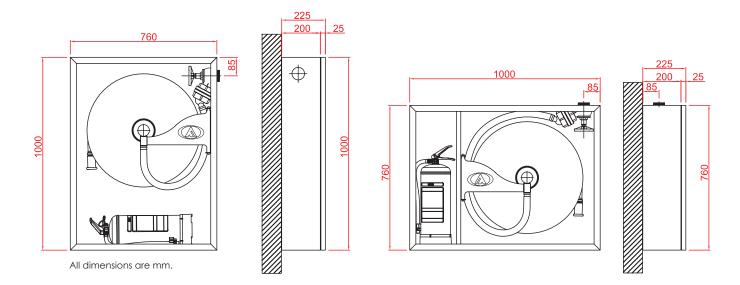

Specifications

Inside Equipments

- Reel, delivering water at its center, made of material resist of corrosion, EN 671-1 certified.
- Fire hose, round, semi-hard, EN 694 certified.
- 1" line hose between the valve and the reel center.
- 2" fire valve, brass.
- 2" storz coupling (aluminium), threaded inside.
- 2" x 1" storz type reducer (aluminium).
- Reel arm move the reel 270°.
- Nozzle with jet / spray / off modes, comply with UL&FM and EN 671-1.
- Reel hub made of A1 grade DKP sheet metal.
- Real arm painted Black-RAL 9005, reel hub electrostatic powder painted Red-RAL 3002.
- Products are packaged after they have been tested %100.

Demountable Door

- Door made of A1 grade DKP sheet metal or glass, demountable.
- Tempered glass for glass door, 4mm and smoke color.
- The recessed type key is used on the door surface which is not creating raise on the door surface.
- Doors are available as an opening to the right or left direction by rotating 180°.
- FIRE and HOSE warning writing on the door surface which have undeletable, untearable and undeform able properties.
- Painted with electro static powder paint which have 70 micron thickness.
- Standard colors are Red-RAL 3002 and White-RAL 9016. Optional colors and designs are available. (in RAL codes)

Cabinet


- Made of A1 grade DKP sheet metal, recessed or surface.
- Valve fittings on side, top and back of the case.
- · Housing for one 6kg fire extinguisher positioned horizontal or vertical also our case can single or double door type.
- Cabinet have installation, ventilation and discharge outlets.
- Console to bear the real, reinforced.
- Cabinet designed for reels used at right and left sides.
- Painted with electro static powder paint which have 70 micron thickness.
- Standard colors are Red-RAL 3002 and White-RAL 9016. Optional colors and designs are available. (in RAL codes)





Outdoor Fire Hydrant Cabinets



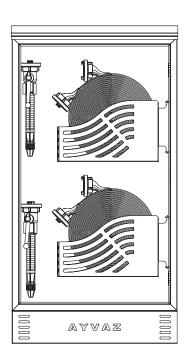



PRODUCTS	DIMENSIONS (mm)
2" – 20m Flat Fire Hose, Single Door, Double Basket Fire Hydrant Cabinet	760x1460x230
2" – 30m Flat Fire Hose, Single Door, Double Basket Fire Hydrant Cabinet	760x1460x230
2 ½" – 20m Flat Fire Hose, Single Door, Double Basket Fire Hydrant Cabinet	760x1460x230
2½" – 30m Flat Fire Hose, Single Door, Double Basket Fire Hydrant Cabinet	760x1460x230

PRODUCTS	DIMENSIONS (mm)
2" – 20m Flat Fire Hose, Single Door, Single Basket Fire Hydrant Cabinet	760x960x230
2" – 30m Flat Fire Hose, Single Door, Single Basket Fire Hydrant Cabinet	760x960x230
2 ½" – 20m Flat Fire Hose, Single Door, Single Basket Fire Hydrant Cabinet	760x960x230
2 ½" – 30m Flat Fire Hose, Single Door, Single Basket Fire Hydrant Cabinet	760x960x230



Specifications

Inside Equipments

- 2" or 2 1/2" diameter, 20m or 30m flat fire hose.
- Single or double flat fire hose basket.
- 2" or 2 1/2" Aluminium Branch pipe nozzle with jet / spray / off modes.
- There are two aluminium coupling on the each edge of hose as mounted with clamp.
- Special design hose reel made of A1 grade DKP one piece sheet metal.
- Special design hose basket is painted with 70 micron thickness electro static powder paint.
- Coupling key and reduction adepter are optional equipments.

Demountable Door

- Door made of A1 grade DKP sheet metal.
- Handle, made of stainless Cr-Ni material, recessed.
- Hinge system, made of stainless Cr-Ni material, hidden.
- Doors are available as an opening to the right or left direction by rotating 180°.
- Standard colors are Red-RAL 3002
- Optional colors and designs are available.

Cabinet

- Cabinet made of A1 grade DKP sheet metal.
- Console to bear the real, reinforced
- Cabinet have installation, ventilation and discharge outlets.
- Products are painted with 70 micron thickness electro static powder paint.
- Standard colors are Red-RAL 3002
- Optional colors and designs are available.

Base

- Base made of A1 grade DKP sheet metal.
- Standard colors are Black-RAL 9005.
- Optional colors and designs are available.
- Installation bolts and nuts are not supplying by us.

Roof

- Base made of A1 grade DKP sheet metal.
- The roof is designed to be curved forward and backward.
- Products are painted with 70 micron thickness electro static powder paint.