



FBAV

BALL VALVE

GENERAL FEATURES

In ball valves, the essential element is a sphere with a hole in the middle. In the 90° rotation of this sphere, it is passed from the fully open position to the fully closed position. Ball valves are primarily used in places that open and close a lot or where it is required to open and close quickly. Its advantages are low pressure losses, easy opening and closing, good sealing, light weight and small footprint. Sealing; It consists of two stages as the sealing of the ball and the sealing of the shaft.

Material

Body: A105/A182 F316
Sphere: AISI316
Connections: Threaded, Socket-Butt
Welded
Nominal Diameter: DN15 (1/2") -
DN50 (2")
Pressure Class: Class 800, Class 150
Temperature Range: From -25°C'den
250°C according to material structure.

Applications

- Heating-cooling lines
- food facilities
- Chemical industry
- Ship constructions
- Paper mills

Control

With Arm, Gearbox,
Electric-Pneumatic Actuator

FBAV FORGED STEEL BALL VALVE

Design Standards

Design Standard:

- NSI B16.34

Connection Standards:

- ANSI B16.11(SW)
- ANSI B1.20.1(NPT)
- ANSI B16.25 (BW)
- ANSI B16.5 (RF)

Test Standard:


- API598

Production Diameter:

- DN15(1/2") - DN50(2")


Pressure Class:

- Class 800 - Class 1500

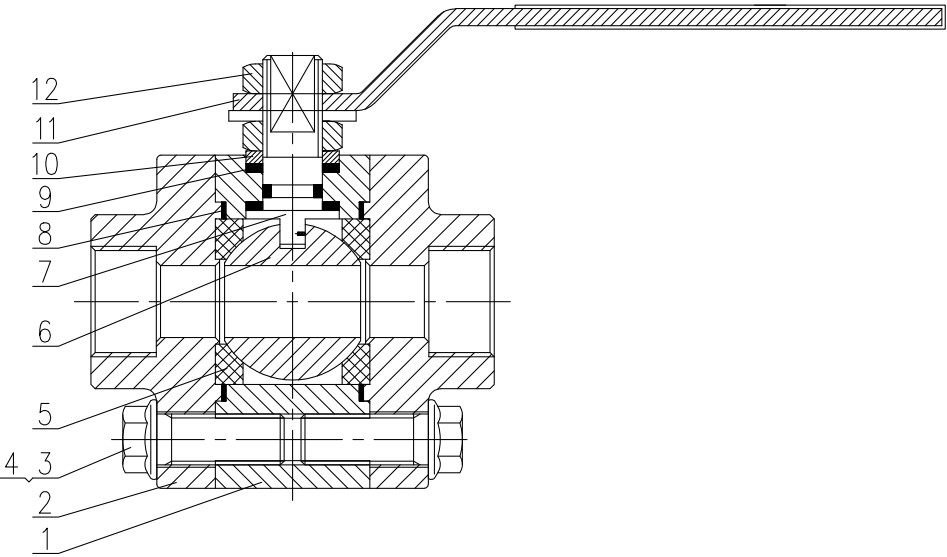

STANDARD MODELS PART LIST			
NO	PART	FBAV-10	FBAV-20
1	Body	A105	A182 F316
2	Cover	A105	A182 F316
3	Cover Bolt	A193 B7	A193 B8
4	Cover Nut	A194 2H	A194 8
5	Seat	RPTFE	RPTFE
6	Sphere	SS316	SS316
7	Stem	A276 316	A276 316
8	Cover Gasket	SS316+Graphite	SS316+Graphite
9	Seal	Graphite	Graphite
10	Seal Flange	A105	A182 F316
11	Lever	Carbon Steel	Carbon Steel
12	Stem Nut	Carbon Steel	Stainless Steel

FBAV FORGED STEEL BALL VALVE

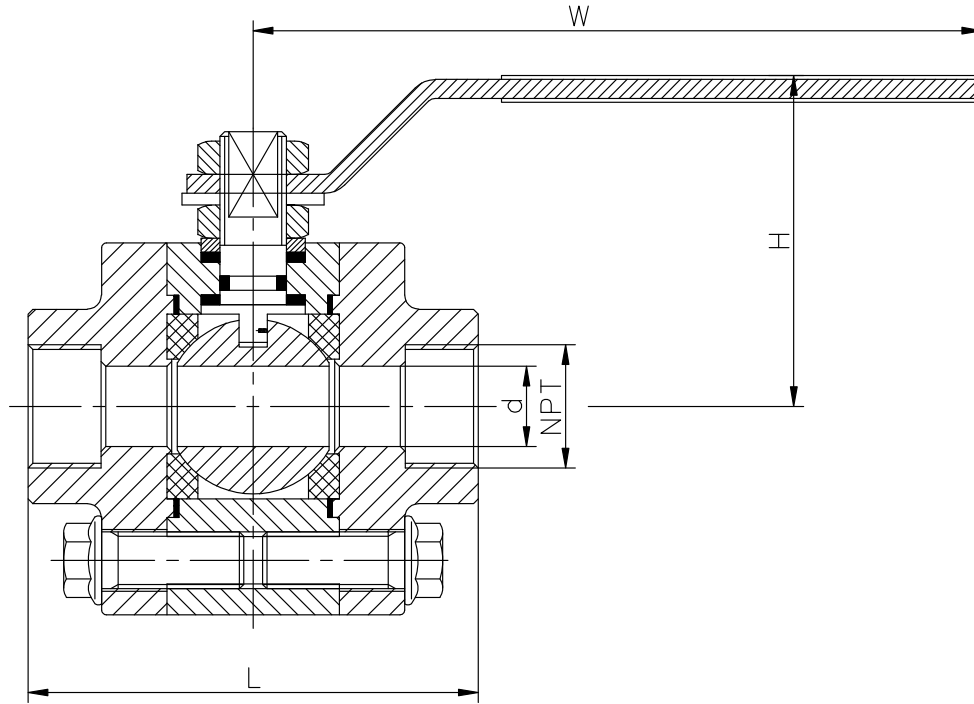

FBAV CLASS 800 (SW, BW, NPT)					
DIA	DN	d	L	H	W
1/2"	15	13	92	68	130
3/4"	20	18	111	75	160
1"	25	24	127	92	220
1 1/4"	32	30	140	112	250
1 1/2"	40	38	152	118	250
2"	50	49	178	128	290

FBAV CLASS 1500 (SW, BW, NPT)					
DIA	DN	d	L	H	W
1/2"	15	13	92	68	130
3/4"	20	18	111	75	160
1"	25	24	127	92	220
1 1/4"	32	30	140	112	250
1 1/2"	40	38	152	118	250
2"	50	49	178	128	290